

100

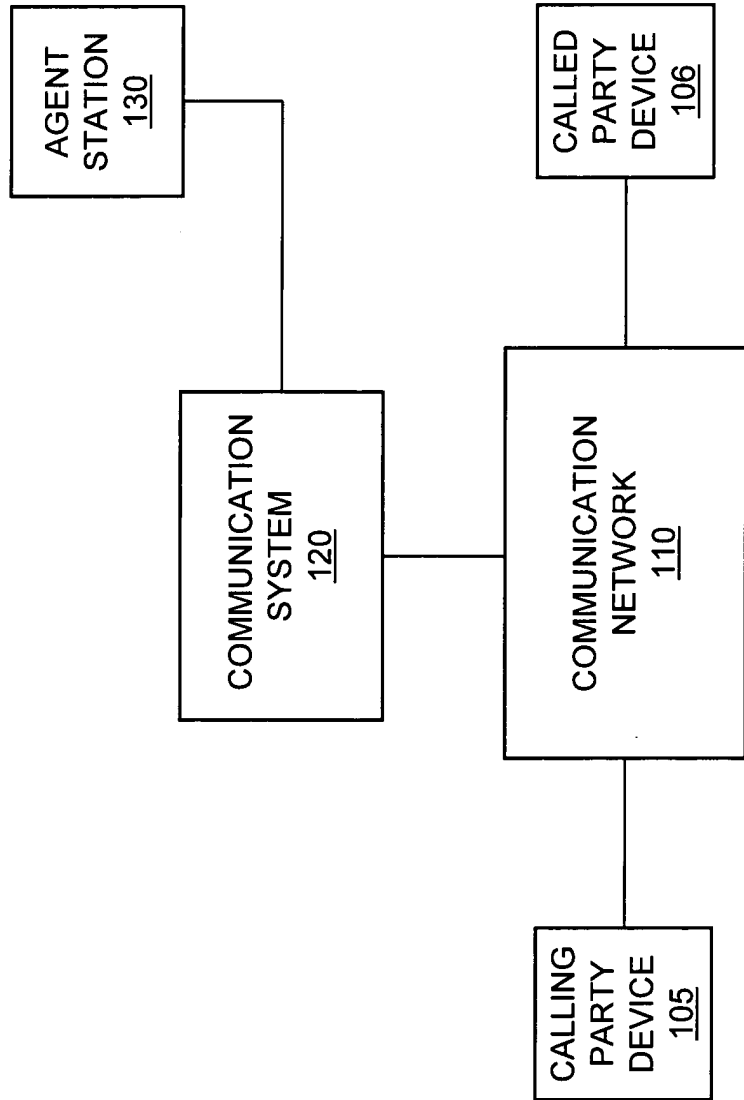


FIG. 1

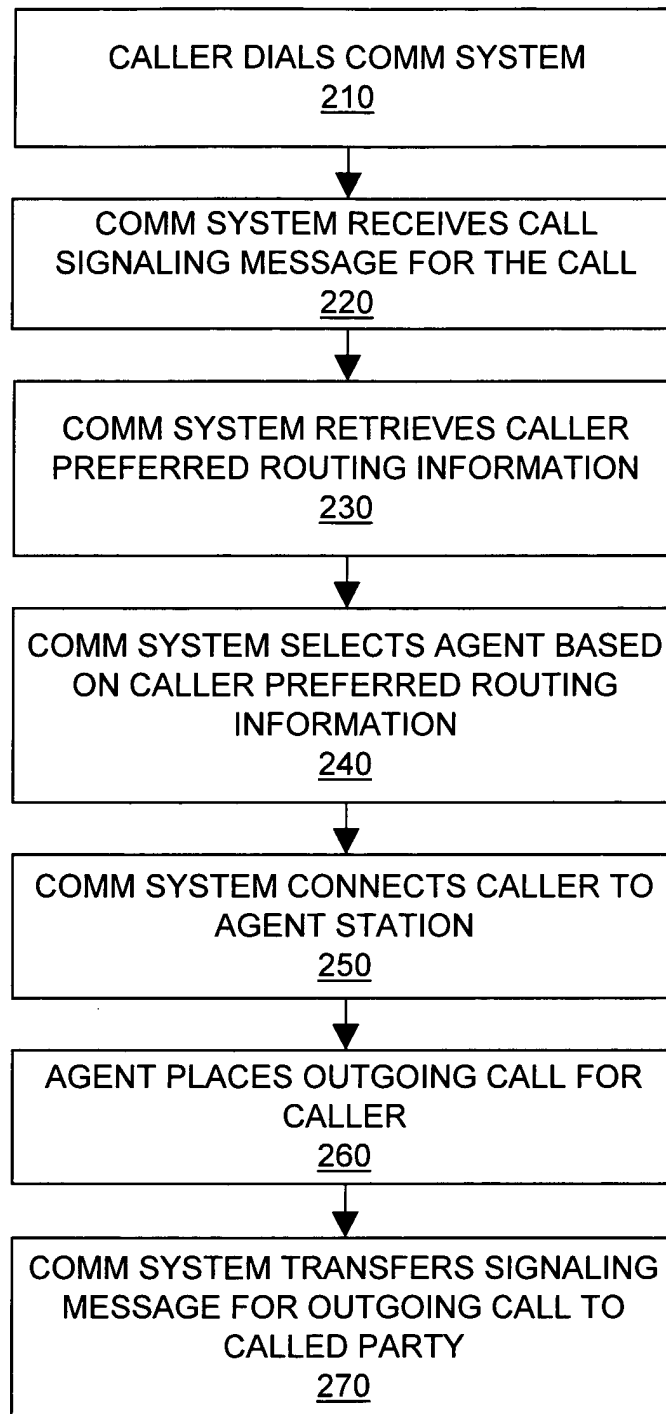


FIG. 2

300 ↗

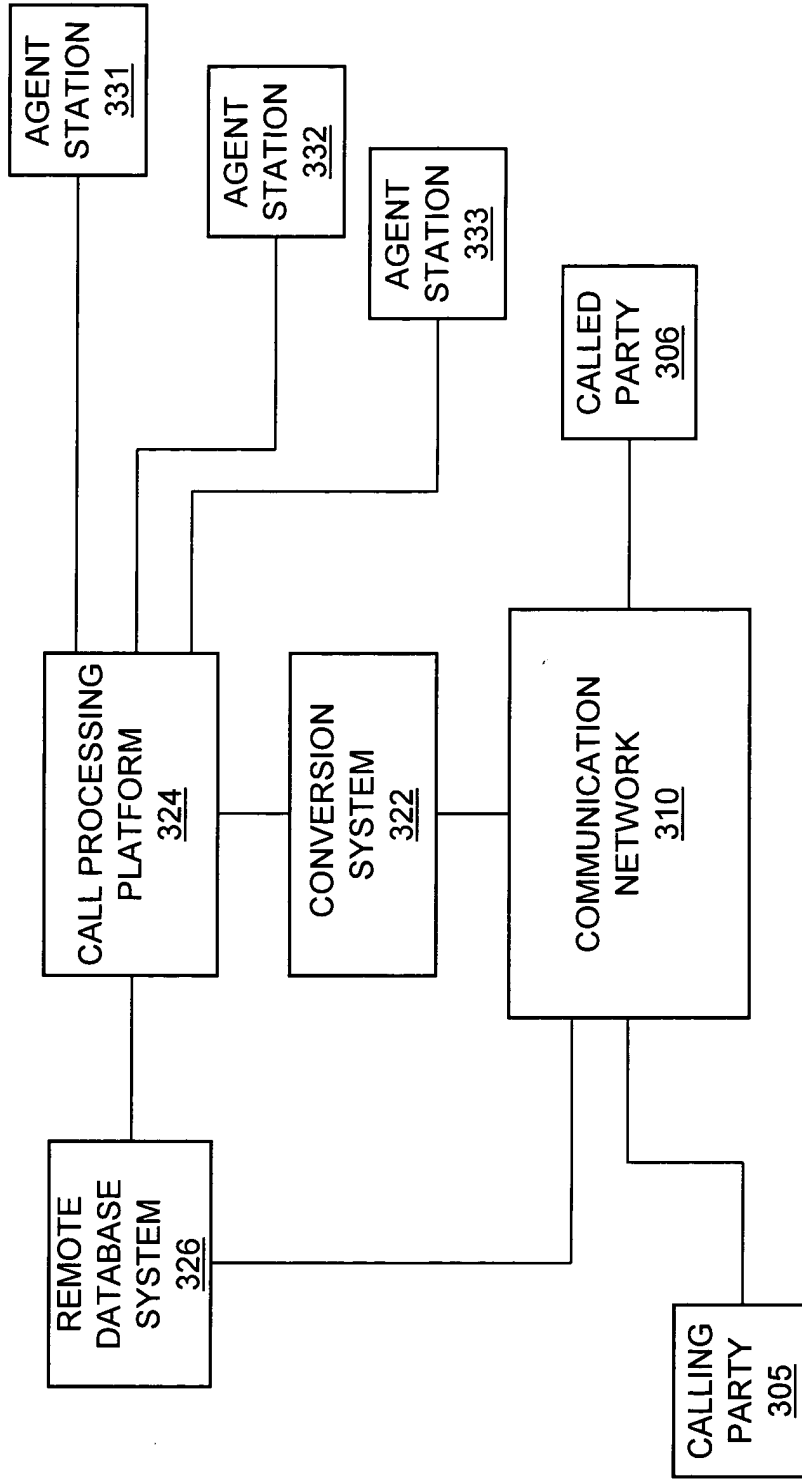


FIG. 3

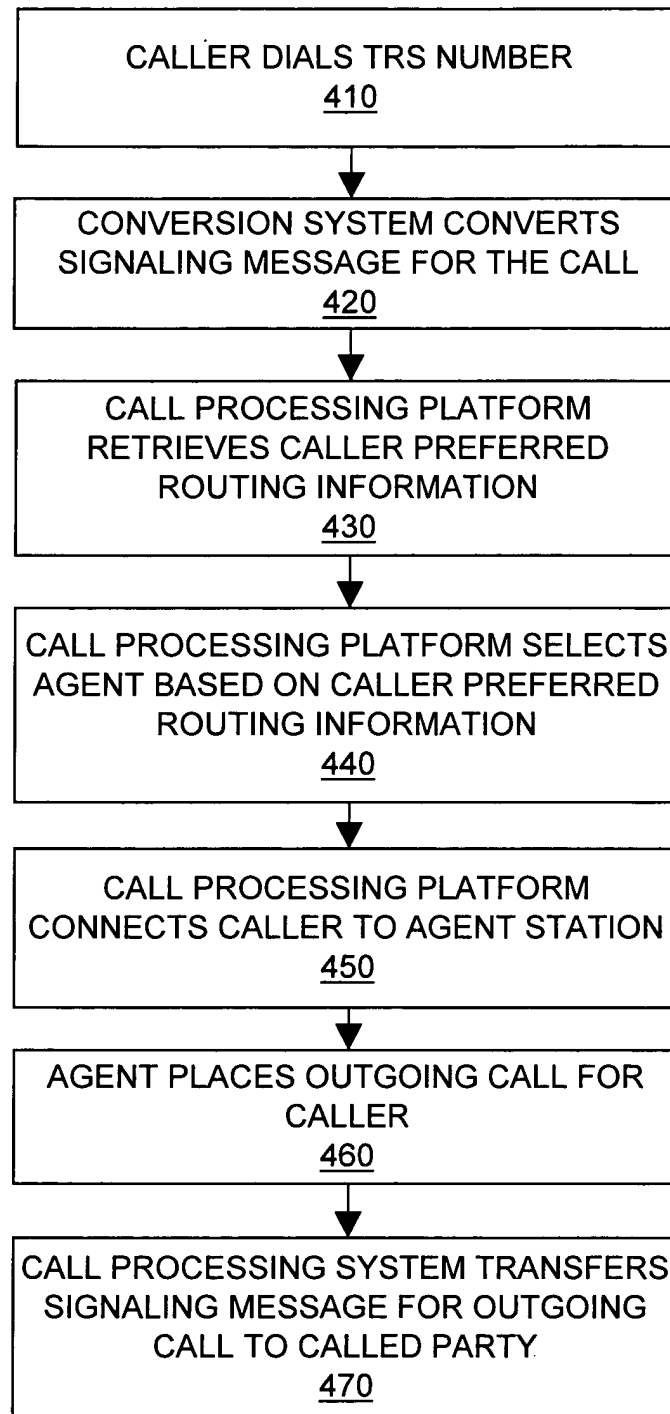


FIG. 4

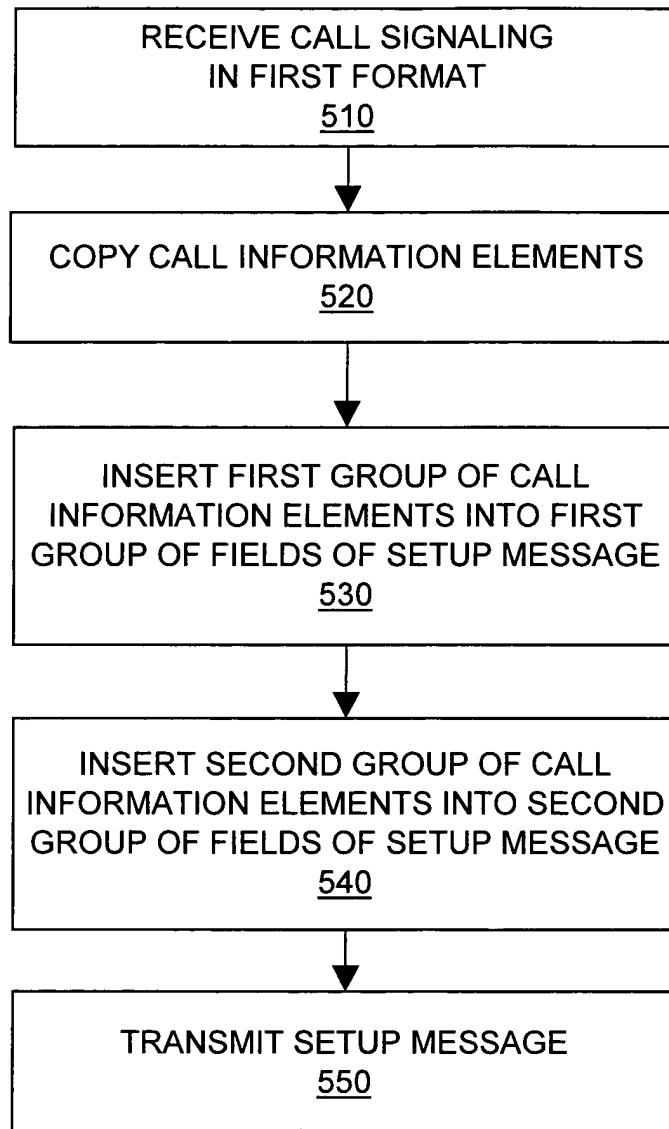


FIG. 5

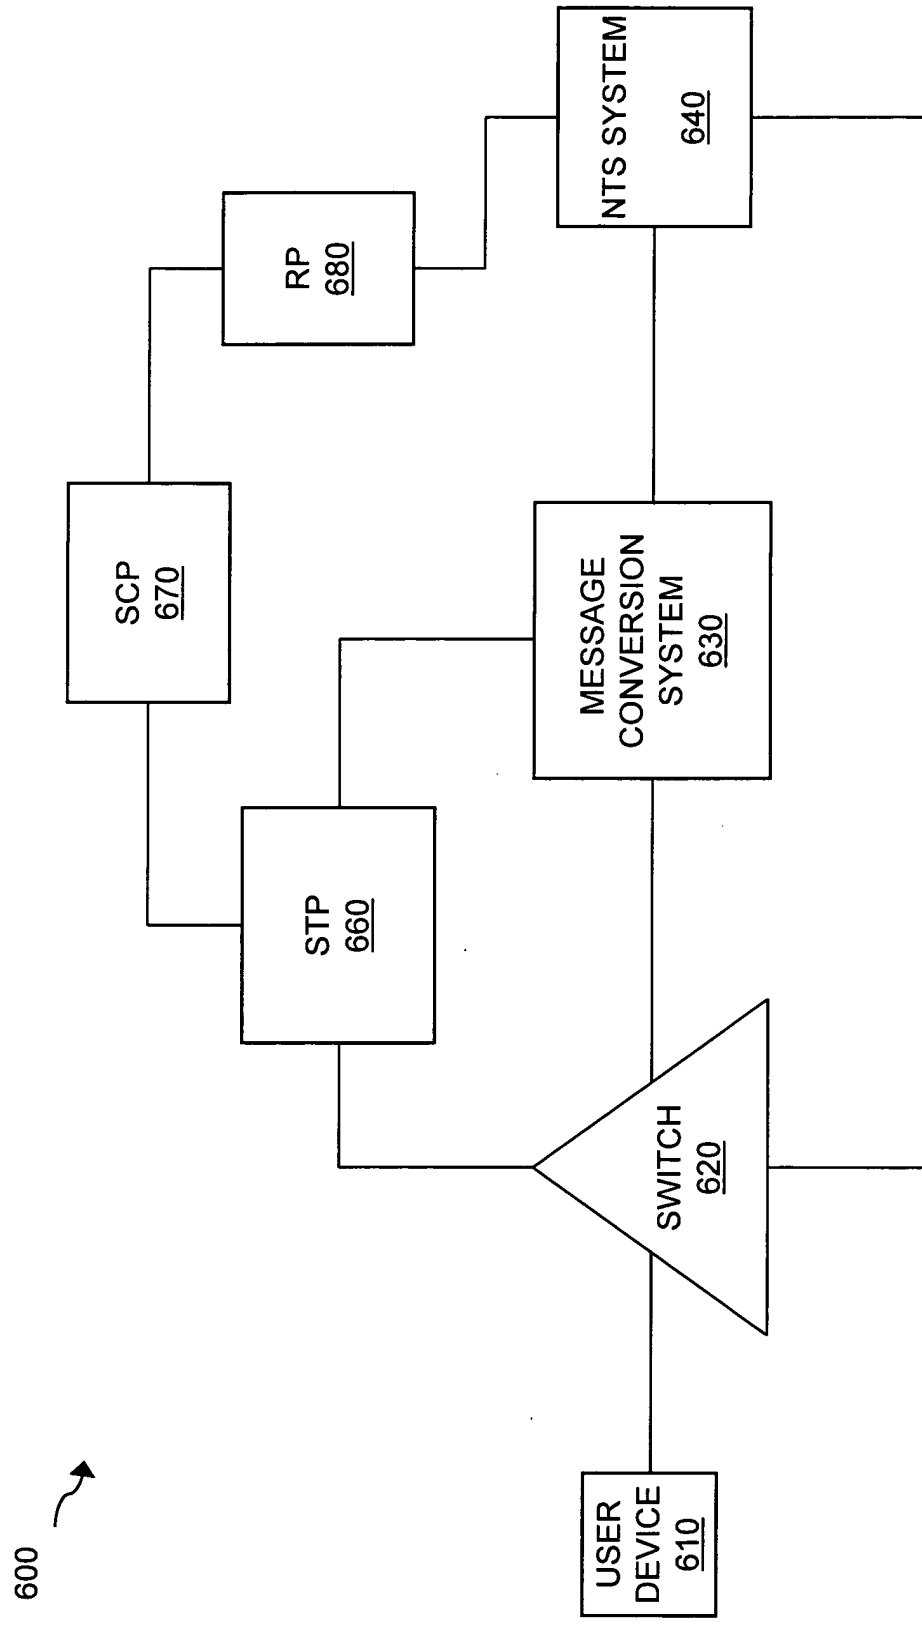


FIG. 6

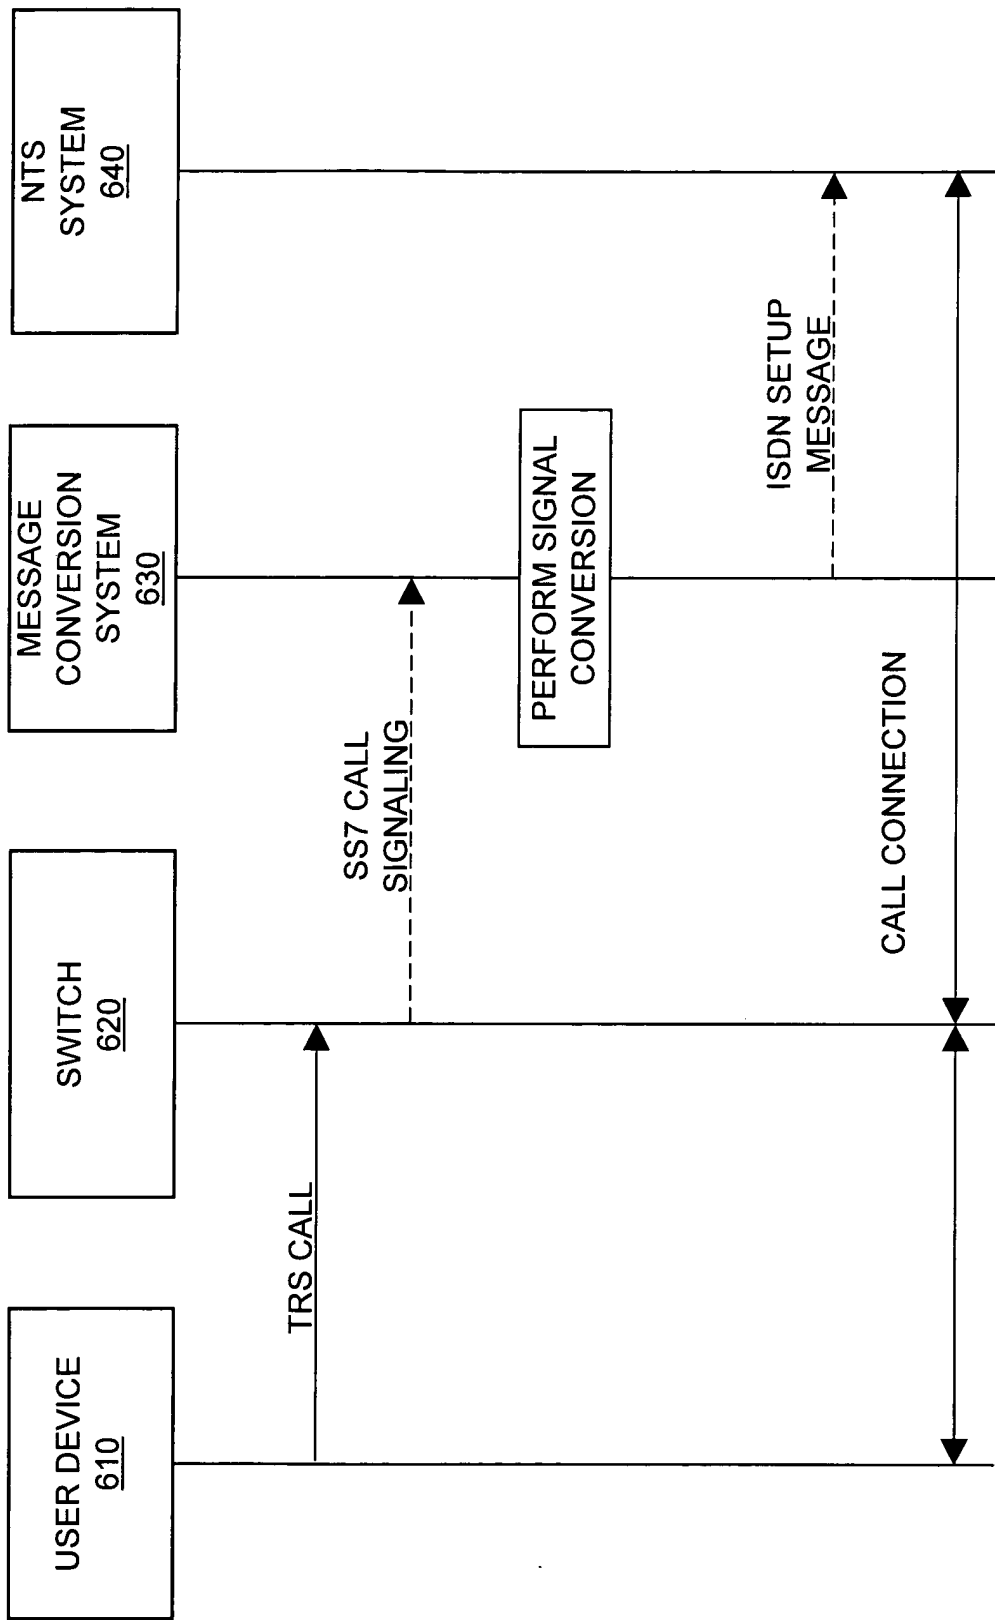


FIG. 7

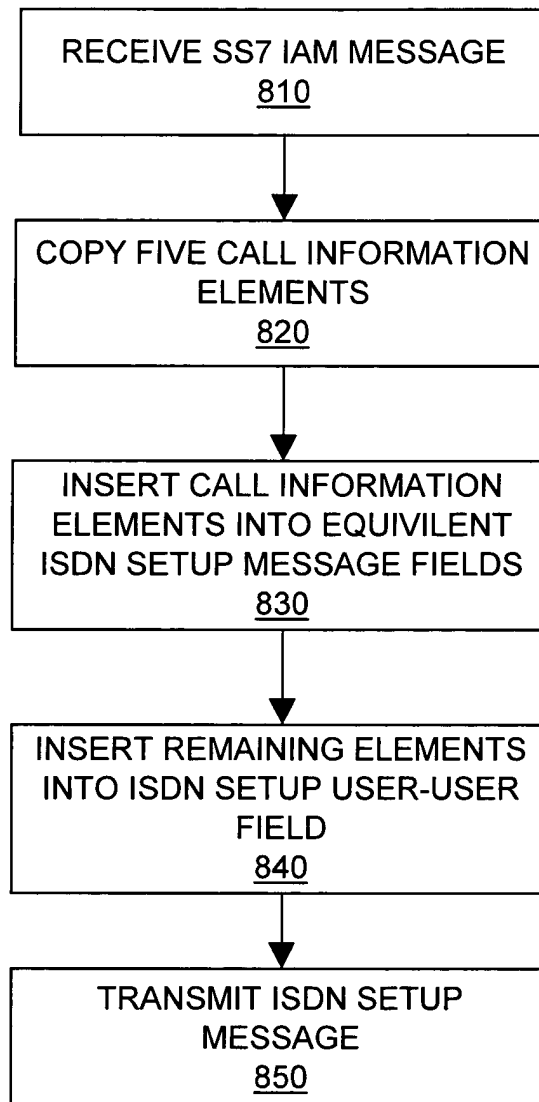


FIG. 8

	8	7	6	5	4	3	2	1
1	Length of User-User contents (n)							
2	Protocol Discriminator							
3	Mask with 0's							Privacy Bit
4-19	Charge Number digits							
20	OLI							
21-n	User to User Information bytes from ISUP message if present in ISUP message							

byte

bit

FIG. 9

	8	7	6	5	4	3	2	1
1	Nature of Address Indicator							
	Odd/Even							
2	Spare	Numbering Plan				Caller ID Presentation 00=allowed, 01=not allowed	spare	
3		Not Used				Calling Number Digit 0		
4		Not Used				Calling Number Digit 1		
5		Not Used				Calling Number Digit 2		
6		Not Used				Calling Number Digit 3		
7		Not Used				Calling Number Digit 4		
8		Not Used				Calling Number Digit 5		
9		Not Used				Calling Number Digit 6		
10		Not Used				Calling Number Digit 7		
11		Not Used				Calling Number Digit 8		
12		Not Used				Calling Number Digit 9		

FIG. 10

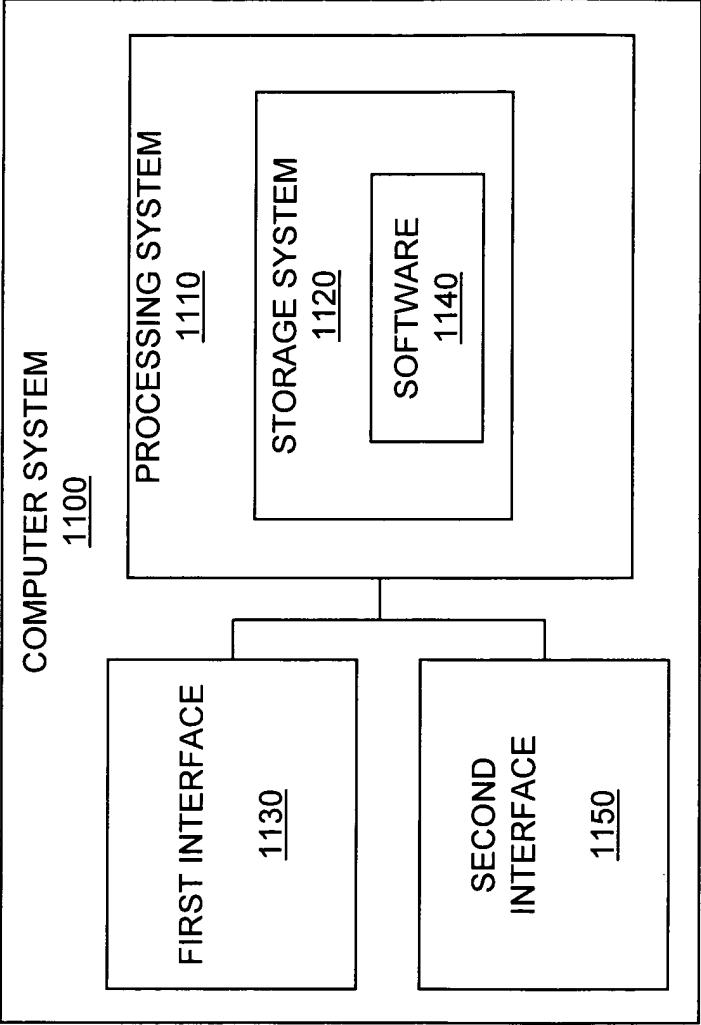


FIG. 11